I/O Transfer

Transfer Terminal Block

MIL connection | Independent light display | High integration





Integration

Saving time/space/cost

50%

*For reference only.




Pin Pitch 2.54mm

20/40 pins
MIL connector optional



35mm DIN Rail Mounting

*Optional screw mounting

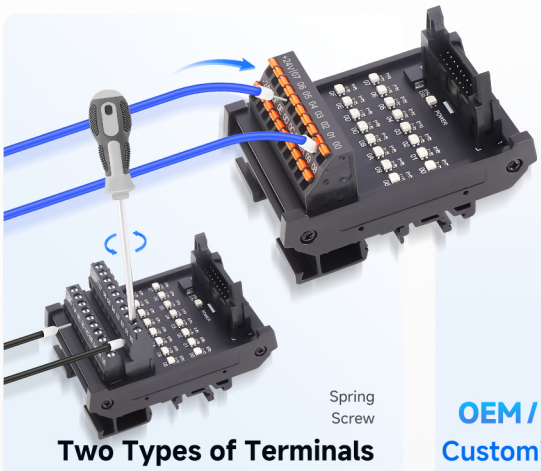

Spring
Screw

Two Types of Terminals

OEM / ODM Customization

Product Information.



Product brand :	ENMG 恩爵
Product name :	EXTB light-indicating junction terminal block
Rated voltage :	125VAC / 30VDC
Rated current :	1A
Dielectric withstand voltage :	500VAC 50/60Hz Time 1min
Insulation resistance :	100MΩ @500VDC
Mounting method :	35mm DIN rail mounting (optional screw)
Terminal specifications :	Screw terminal: Terminal M2.5 Spacing 5.0mm Rated capacity 10A 300V Applicable wire diameter 22-12AWG Torque 0.4Nm Wire stripping length 6~7mm Spring terminal: Spacing 5.0mm Rated capacity 15A 300V Applicable wire diameter 22-16AWG (1.5mm²) Wire stripping length 8~9mm
Ambient humidity :	45%~85%RH
Ambient temperature :	-10°C ~ 50°C No condensation, no icing

* Product features and appearance structure are subject to change due to technological innovation and improvement without prior notice;
Due to reasons such as shooting, typesetting, printing, etc., there will be slight differences between the product images and the actual products.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Select Specifications.

Model Description

The design of product models and ordering codes is intended to cover all possible specifications of this series of products, and they cannot be combined arbitrarily. If you have any questions during the first selection, please contact the technical service engineers for confirmation.

Wiring-saving terminal I/O transfer terminal block module

Number of channels
20: 20 channels
40: 40 channels

Terminal type
S: Screw
M: Spring

EXTB - C 20 N S - L


Connector type
C: MIL

Upper machine position
N: NPN COM+
P: PNP COM-

Base type
L: Panel width 72mm Rail installation

Selection Table

*Unit: mm±0.5.The dimensions are measured manually,so there may be deviations. Please refer to the actual product.

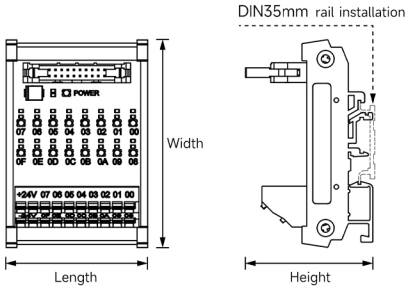


Channel	Upper machine position type	Model		L×W×H
		Screw terminal	Spring terminal	
20 channels	NPN	EXTB-C20NS-L	EXTB-C20NM-L	59×87×52
	PNP	EXTB-C20PS-L	EXTB-C20PM-L	
40 channels	NPN	EXTB-C40NS-L	EXTB-C40NM-L	109×87×52
	PNP	EXTB-C40PS-L	EXTB-C40PM-L	

Internal Schematic Diagram.

NPN COM+ Upper Machine Position Common Positive


20 channels

EXTB-C20NS-L EXTB-C20NM-L



40 channels


EXTB-C40NS-L EXTB-C40NM-L

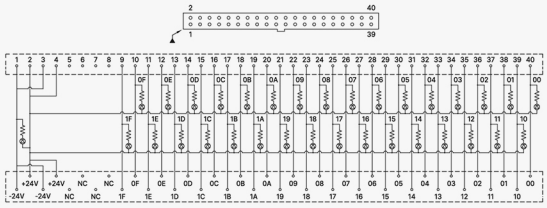

PNP COM- Upper Machine Position Common Negative


20 channels

EXTB-C20PS-L EXTB-C20PM-L



40 channels


EXTB-C40PS-L EXTB-C40PM-L

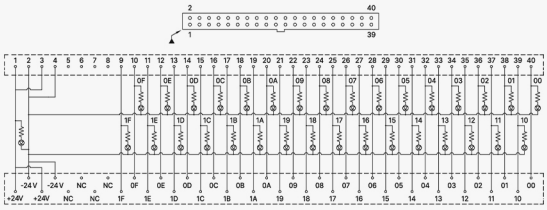

* Product features and appearance structure are subject to change due to technological innovation and improvement without prior notice;
Due to reasons such as shooting, typesetting, printing, etc., there will be slight differences between the product images and the actual products.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Appearance Display.

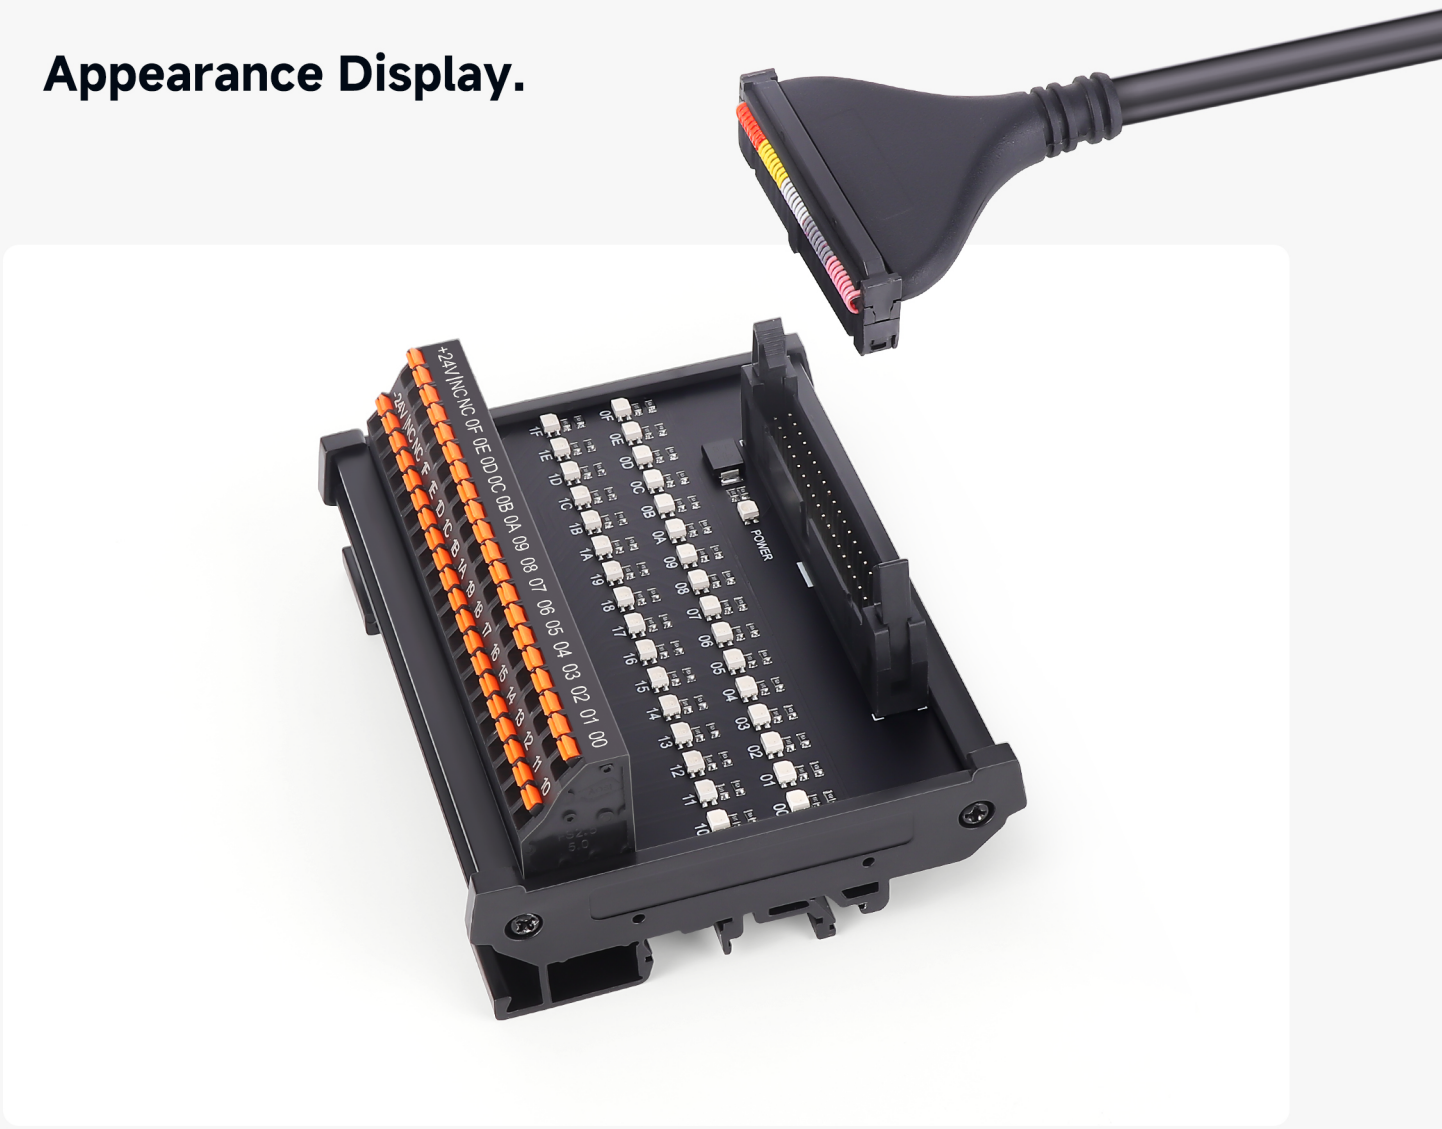





* Product features and appearance structure are subject to change due to technological innovation and improvement without prior notice;
Due to reasons such as shooting, typesetting, printing, etc., there will be slight differences between the product images and the actual products.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

ENMG 恩爵

Started in 2012, exploring the frontier, leading innovation, self-transformation, the world of ideas.

始于2012年，探索前沿 、 创新引领 、 自我蜕变 、 理念世界。

ENMG INTELLIGENT TECHNOLOGY

恩爵ENMG智能科技

Zhejiang ENMG Intelligent Technology Co., Ltd.

浙江恩爵智能科技有限公司

Wenzhou Yuanzhang Electric Co., Ltd.

温州元璋电气有限公司

公司地址 Address： 浙江省乐清市柳市镇柳江路3788号

联系方式 Telephones： 400-996-2708

官方网站 Website： www.enjue.cc

迪威模型 3D Model： www.3dwhere.com/user/135269

微信公众号
WeChat Public

微信客服
WeChat Clientele Services

入驻平台 ENTRY PLATFORM

在线搜索“恩爵旗舰店”，线上下单实惠方便!

Search for “ENMG Flagship Store” online, ordering online is affordable and convenient !

天猫 Tmall　淘宝 Taobao　1688　京东 JD　拼多多 PDD　抖音 TikTok　速卖通 AliExpress

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000